

# HARWIN

CONNECT TECHNOLOGY  
WITH CONFIDENCE




**BBi**  
RANGE

**ARCHER**

# PIN HEADER / SOCKET CONNECTORS

1.27MM (.05") PITCH

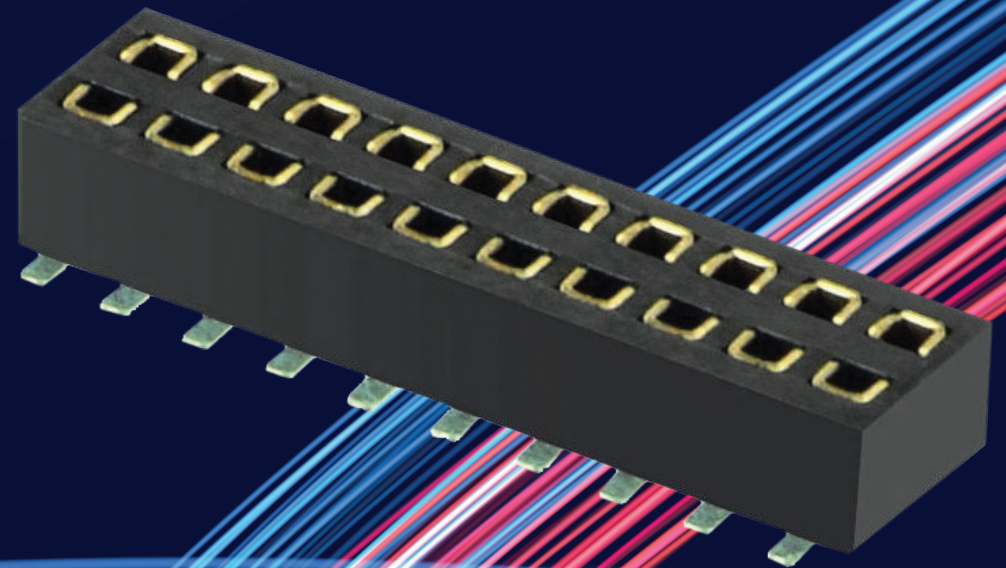

# HARWIN

**ARCHER**

# BBi CONNECTORS FROM HARWIN.

## DEPENDABLE PERFORMANCE ON 1.27MM (.05") PITCH

Reliable all-purpose connectivity with cost-effective simplicity. Stocked in depth across the global distribution network. Compatible with industry-standard designs.

Archer connectors are based on a miniaturized half-pitch version of the M20 2.54mm pitch series. At 1.27mm (.05") pitch, these connectors give up to 38% space saving on 2mm pitch, and 50% on the 2.54mm pitch. This space saving allows more room for added functionality or smaller PCBs and enclosures.

Throughboard and Gull-wing SMT terminations, straight and right-angle orientations. Contact counts from 2 to 100 are available.

Female receptacle twin-beam or tuning fork connectors are enclosed in a rectangular protective housing – some designs also include polarization and location pegs. Double row connectors have either 1.27mm or 2.54mm between rows; single row is also available.

Cable connectors use IDC contacts for fast cable termination. No cable stripping required; contacts pierce through the insulation and connect with the ribbon cable conductors. Ready-made cable assemblies with pre-set lengths available from stock.

## FEATURES

- Dependable and reliable, easy to use
- Compatible with industry standard equivalent connectors
- Quality cost-effective connections

## APPLICATIONS

- Embedded computing
- Factory automation
- Consumer electronics
- Metering and monitoring





## SPECIFICATIONS

MATERIALS	ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Housings: <b>Glass-filled Thermoplastic, UL94V-0</b>	Current per contact: <b>0.5A to 1.75A</b> (check individual product)	Durability: <b>25 to 600 operations</b> (check individual product)	Operating temperature: <b>-40°C to +105°C (Connectors)</b> <b>-20°C to +105°C (Cable Assemblies)</b>
Contacts: <b>Copper Alloy</b>	Maximum voltage: <b>250V to 1,000V</b> (check individual product)	Insertion force (per contact): <b>2.0N max (Connectors)</b> <b>10N max total (Jumper Sockets)</b>	
Contact Finish: <b>Gold on contact area,</b> <b>Tin or Gold on termination</b>	Contact resistance: <b>30mΩ max</b>	Withdrawal force (per contact): <b>0.1N min (Connectors)</b> <b>1.3N min total (Jumper Sockets)</b>	Compliance: <b>RoHS Compliant</b> <b>REACH / CMRT statements</b>
Cable: <b>PVC to UL2678, 30 AWG</b>	Insulation resistance: <b>5mΩ min (cable)</b> <b>500mΩ min (connectors)</b>	Pitch: <b>1.27mm (.05")</b>	


Specifications are subject to change.

# ARCHER

## PRODUCT CATEGORIES


### M50 BOARD-TO-BOARD

Straight and right-angle orientation for male plug and female receptacle connectors, single and double row designs. Male plug contacts use 0.4mm square pins. Throughboard or SMT gull-wing terminations for easy solder joint inspection. Use male plug pin headers with jumper sockets for on-board hardware programming.

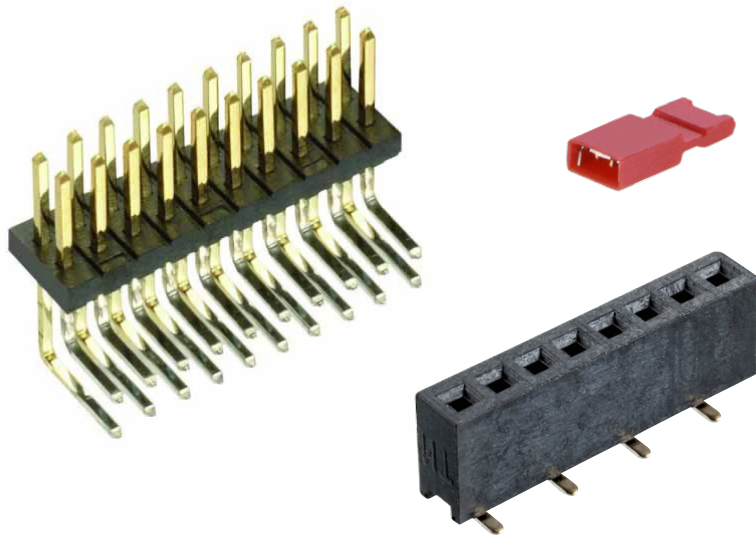

### M50 IDC: CABLE-TO-BOARD

IDC terminations for 30AWG, 0.635mm pitch ribbon cable termination. Complete cable assemblies in female receptacle-female receptacle or male plug-female receptacle configurations, or male plug transition DIP & female receptacle connectors with tooling for do-it-yourself assembly. Fully shrouded & polarized male plug PCB and female receptacle cable connections. Male plug PCB connectors include ejector latches for fast and easy un-mating. Male plug contacts use 0.4mm square pins.

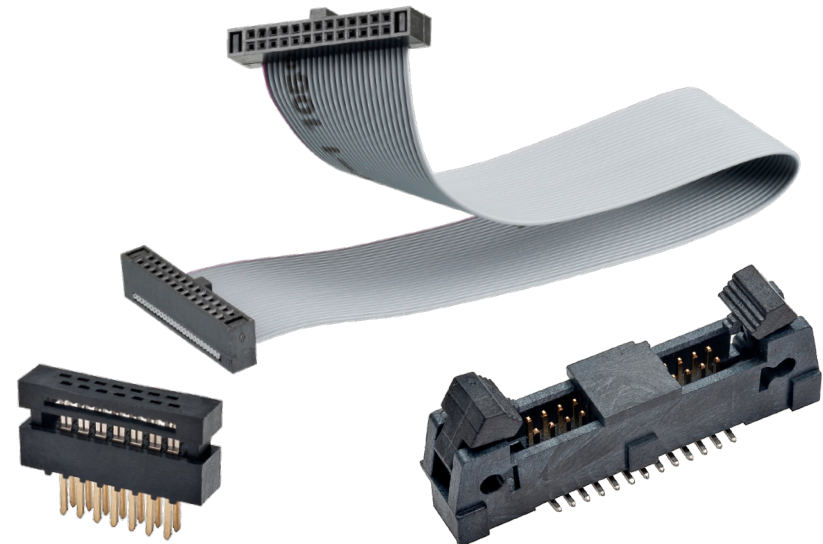

Specifications are subject to change.



VIEW FULL SERIES & SPECIFICATIONS [HERE](#)




# ARCHER

## PRODUCT CATEGORIES


### M50 BOARD-TO-BOARD POLARIZED

Double row straight SMT female receptacle PCB connector with location pegs and polarized housing. Choice of male plug connectors in straight SMT, straight and right-angle throughboard orientations. Male plug contacts use 0.4mm square or 0.4x0.3mm pins.

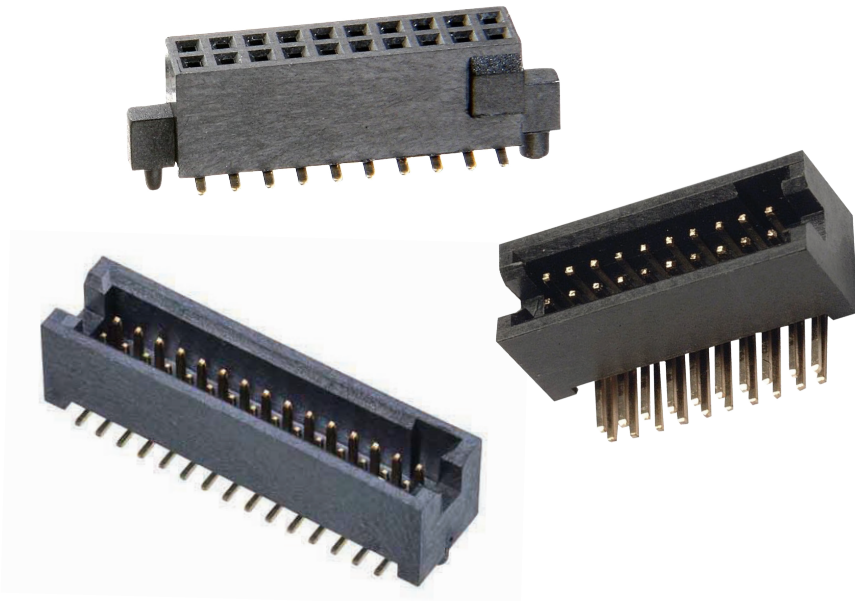

### M52 BOARD-TO-BOARD

Straight orientation male plug and female receptacle connectors in throughboard and surface mount. Single and double row designs, with 2.54mm between rows on the double row style. Male plug contacts use 0.46mm square pins. Choice of straight connector height on female receptacles for different board-to-board heights.

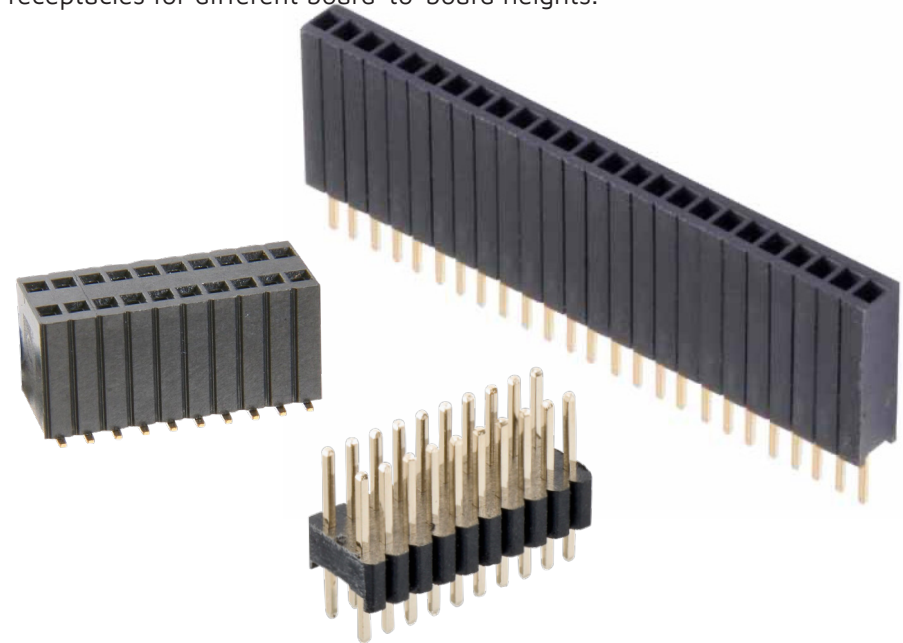

Specifications are subject to change.



VIEW FULL SERIES & SPECIFICATIONS [HERE](#)



 **ARCHER****DOWNLOADS****TECHNICAL DOCUMENTS**

Component Specification  
(including pin numbering system)

**PRODUCT TRAINING**

Product Training Module (PTM)



Archer IDC Termination Hand Tool Instructions



Specifications are subject to change.



VIEW FULL SERIES & SPECIFICATIONS **HERE**



# HARWIN

CONNECT TECHNOLOGY  
WITH CONFIDENCE



**HRI**  
RANGE



**BBI**  
RANGE



**EZI**  
RANGE

FOR FURTHER INFORMATION PLEASE CONTACT:

[SUPPORT@HARWIN.COM](mailto:SUPPORT@HARWIN.COM)

[WWW.HARWIN.COM](http://WWW.HARWIN.COM) ○