

All dimensions in mm	If in doubt - ask	©

Customer Information Sheet


Table 1: Product Performance		
Working Height	9.05mm	500±110gf
Durability	10000 Cycles Min.	
Current Rating	8A	


Packaging Information

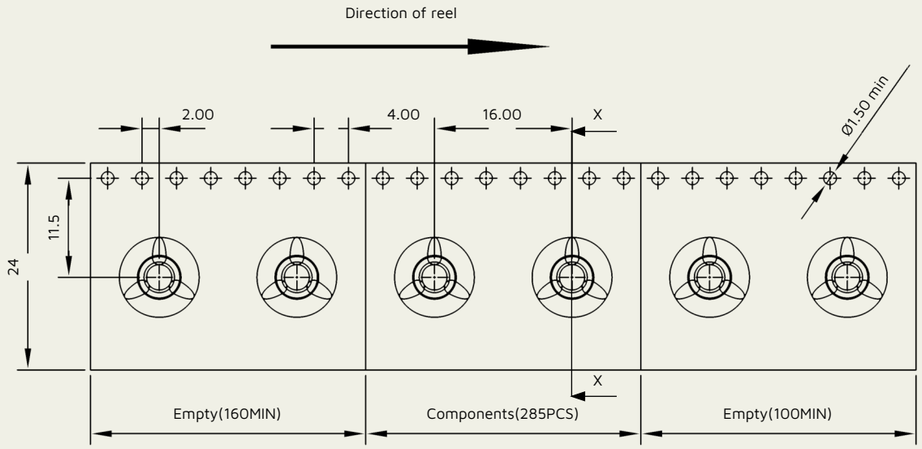



Product Information

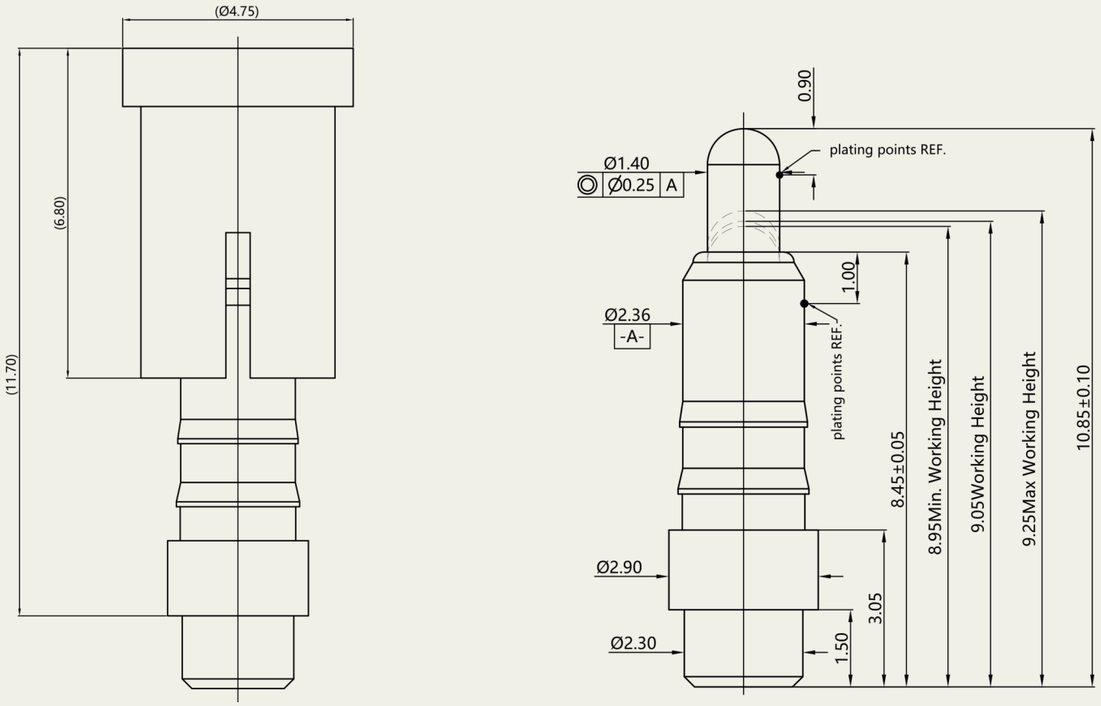


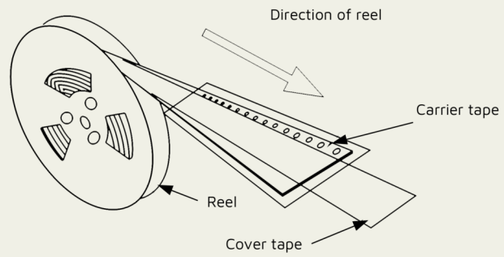

Notes:

1. For complete performance specifications, refer to component specification C053XX (latest released revision).
2. Product is tape and reeled in general accordance with EIA-481 (Electronic Industries Association).
3. Pack Quantity = 285 pieces per reel.
4. Unless otherwise specified, product dimensions are as follows:
   X.X = ±0.15
   X.XX = ±0.10
   ANGLES = ±1°
5. Unless otherwise specified, packing dimensions are as follows:
   X = ±0.25
   X.X = ±0.15
   X.XX = ±0.10
   X.XXX = ±0.05
   ANGLES = ±1°

Initials	Rev.	Date	CO
SB	2	12.10.26	40254
SB	1	07.08.26	39565



RECOMMEND PCB LAYOUT(TOP VIEW)
Layout Tolerance: ± 0.05mm

HARWIN
www.harwin.com

This drawing and any information or descriptive matter set out hereon are confidential and copyright property of the Harwin group and must not be disclosed, loaned, copied or used for manufacturing, tendering or for any other purpose without their written permission.

TOLERANCES
X. = ±0.50mm
X.X = ±0.30mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
Angles = ±5°
Unless stated

Third angle projection

Sheet scale: Do not scale
Sheet size: A3

MATERIAL:
Body & Plunger: Brass
Ball: Copper Alloy
Spring: Stainless Steel

FINISH:
gold over nickel

Title:
SMT Spring Loaded Pogo Pin with Peg

Drawing number:
P70-3040045R

SHT 2 OF 2