

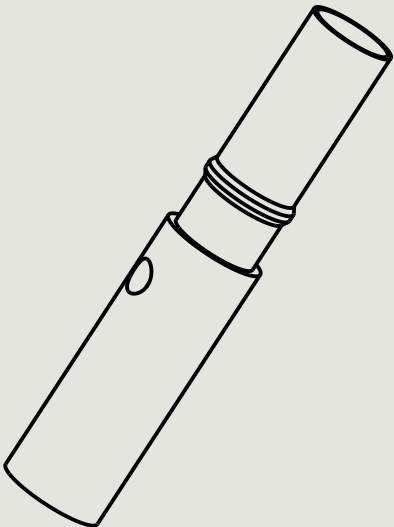


Customer Information Sheet

Specification:
Material:
 Contact Shell = Brass
 Contact Clip = Beryllium Copper
Finish:
 01 = 100% Tin over Nickel shell, Gold Clip
 05 = Gold shell, Gold clip
Packing:
 Bulk
For complete connector specification, see component specification C005XX (Latest Issue)

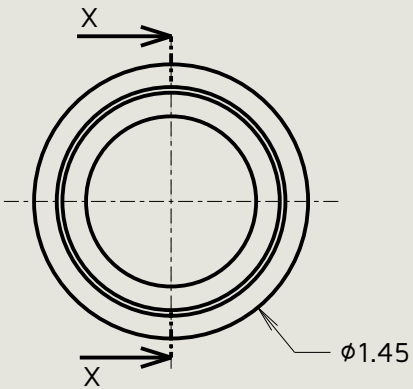

SCALE 10:1

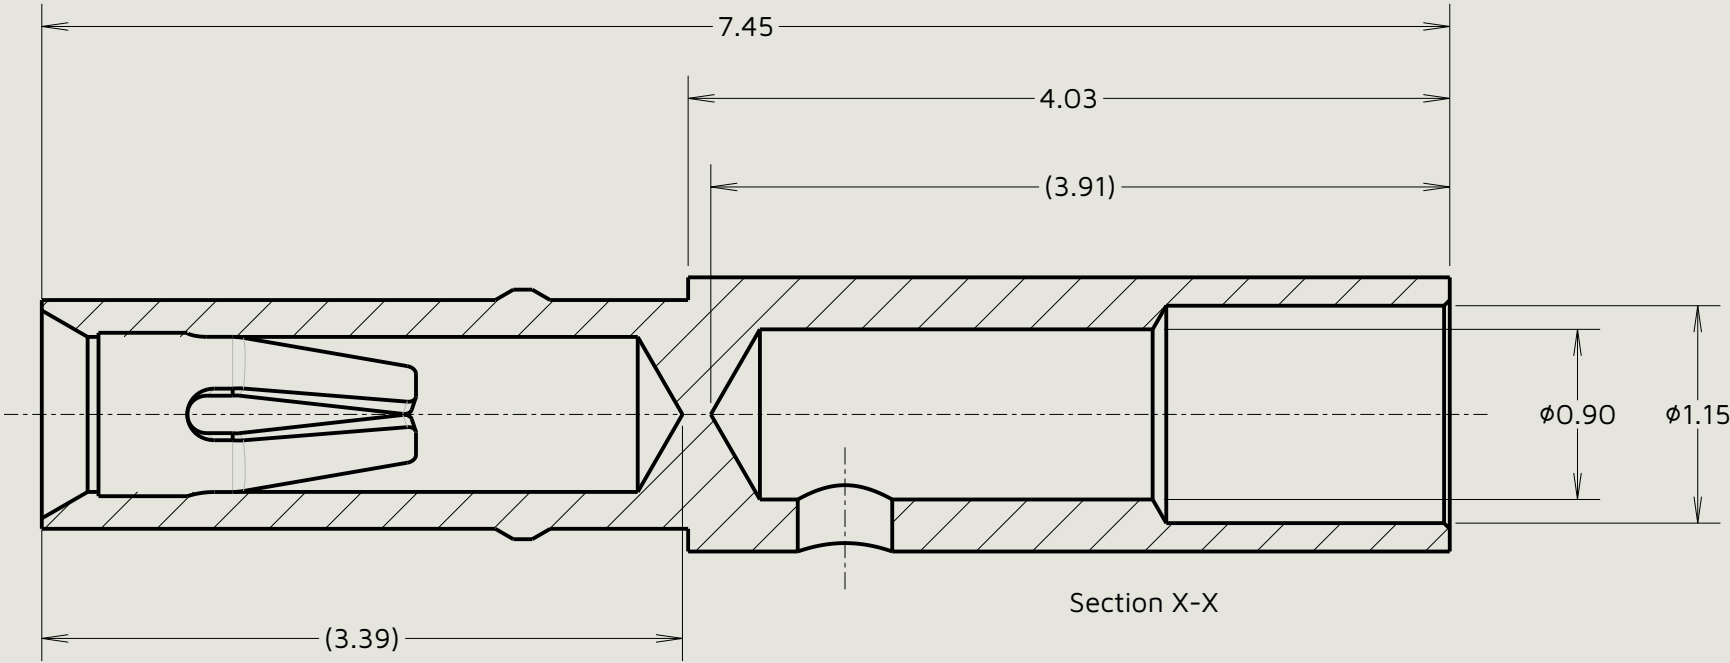


Order Code:
 B5780-01100XX

FINISH:
01 = 100% Tin shell, Gold clip
05 = Gold shell, Gold clip

Initials	Rev.	Date	CO
MJ	1	17.11.25	36943

- NOTES:
- Suitable for wire gauge 22AWG. MAX insulation diameter ϕ 1.10mm, BS3G210 Type A wire recommended. Strip wire by 2.00mm for crimping.
 - Recommended crimp tool M22520/2-01, Positioner=T5747.
 - For instruction on hand crimp tool M22520/2-01, see instruction sheet IS-01.
 - Recommended mating pin size = ϕ 0.46-0.51mm.

 www.harwin.com	This drawing and any information or descriptive matter set out hereon are confidential and copyright property of the Harwin group and must not be disclosed, loaned, copied or used for manufacturing, tendering or for any other purpose without their written permission.	TOLERANCES X. = $\pm$ 0.50mm X.X = $\pm$ 0.30mm X.XX = $\pm$ 0.10mm X.XXX = $\pm$ 0.01mm Angles = $\pm$ 5° Unless stated	Third angle projection 	MATERIAL: See above	Title: Crimp Socket Contact Assembly (Large Bore)	
			Sheet scale: 25:1 Do not scale Sheet size: A3	FINISH: See above	Drawing number: B5780-01100XX	SHT 2 OF 2