

Customer Information Sheet

IF IN DOUBT - ASK




©

NOT TO SCALE


THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm







Ø 80 MIN
REEL DETAILS

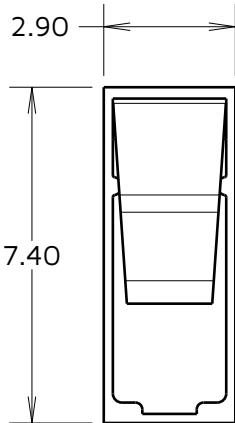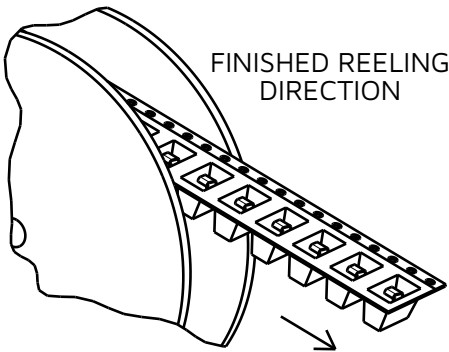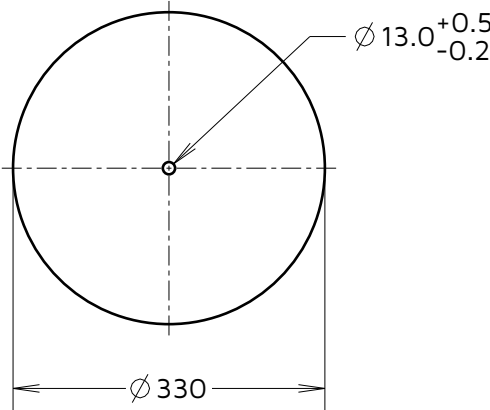

RECOMMENDED PCB LAYOUT

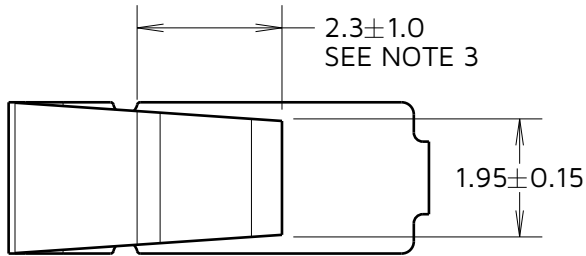

CROPPED COMPONENT DIMENSIONS

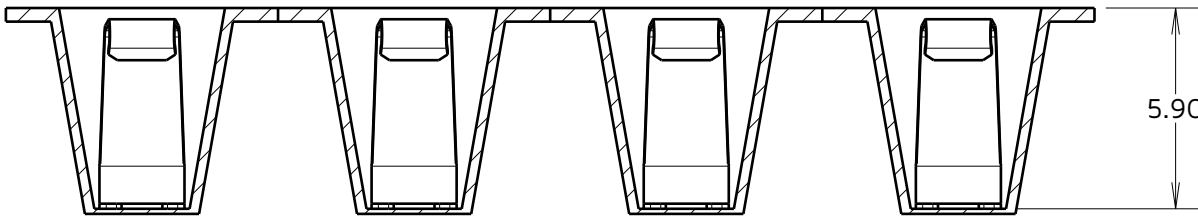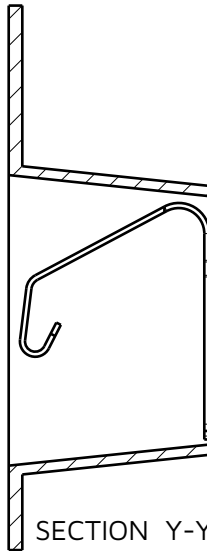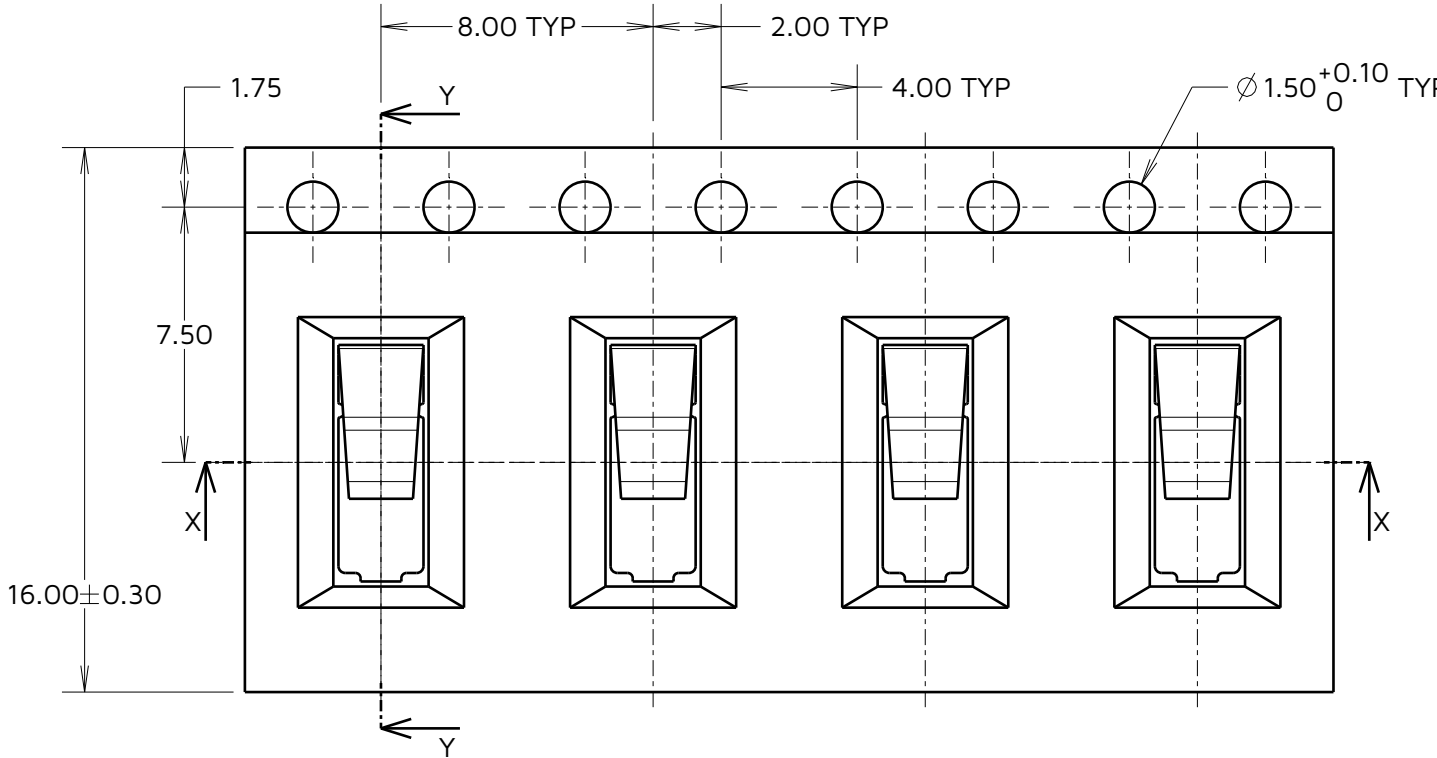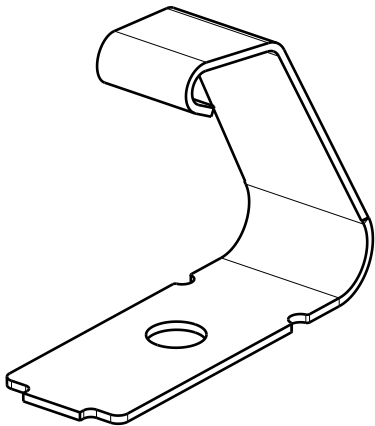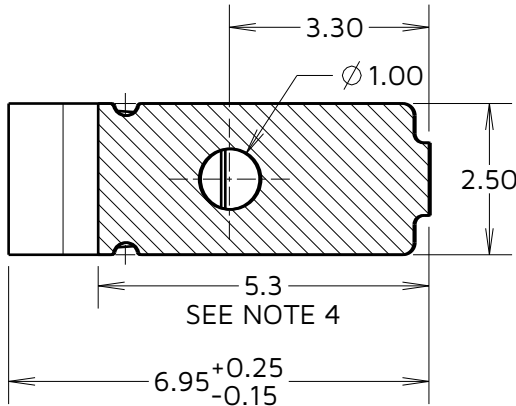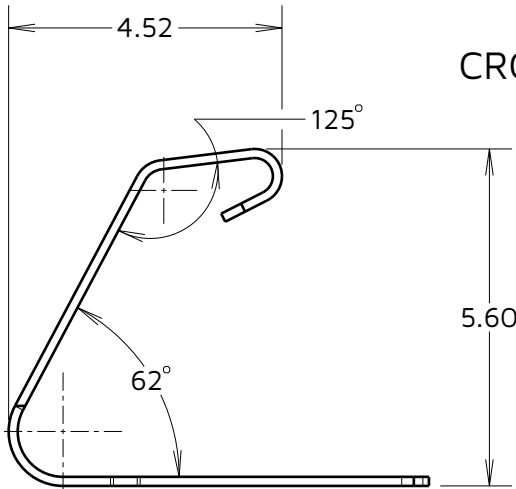

SECTION X-X

- NOTES:
1. QUANTITY OF COMPONENTS PER REEL:
S7061-42R = 1500,
S7061-46R = 1200.
 2. THIS PRODUCT IS TAPED AND REELED IN GENERAL ACCORDANCE WITH EIA-481-2 (ELECTRONICS INDUSTRIES ASSOCIATION).
 3. GOLD PLATING AREA ON S7061-42R.
 4. TIN PLATING AREA ON S7061-42R.

COMPONENT SPECIFICATION
MATERIAL:
42 = TITANIUM COPPER ALLOY, 0.15mm THICK
46 = BERYLLIUM COPPER ALLOY, 0.15mm THICK
FINISH:
42 = 100% TIN ON FOOT AREA,
GOLD FLASH ON CONTACT,
NICKEL ALL OVER.
46 = 100% TIN OVER
NICKEL ALL OVER.

ORDER CODE:
S7061-XXR
FINISH: _____
42 - SELECTIVE GOLD & TIN
OVER NICKEL
46 - TIN OVER NICKEL

MJ	13	19.11.24	35078
NAME	ISS.	DATE	CN/CO
APPROVED:		M. JELLEY	
CHECKED:		A. BOXALL	
DRAWN:		S.BENNETT	

HARWIN

www.harwin.com

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

SEE ABOVE

TITLE:
**SMT SHIELD FINGER
IN TAPE AND REEL**

DRAWING NUMBER:
S7061-XXR

SHT
3
OF
3