

Customer Information Sheet

Specifications

Material:

Contact = brass


Finish:

05- Gold over nickel


Packing:

Bulk

For complete specification, see component specification C005XX (latest issue)

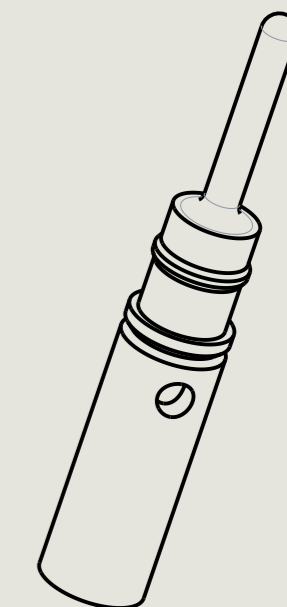

Scale 10:1

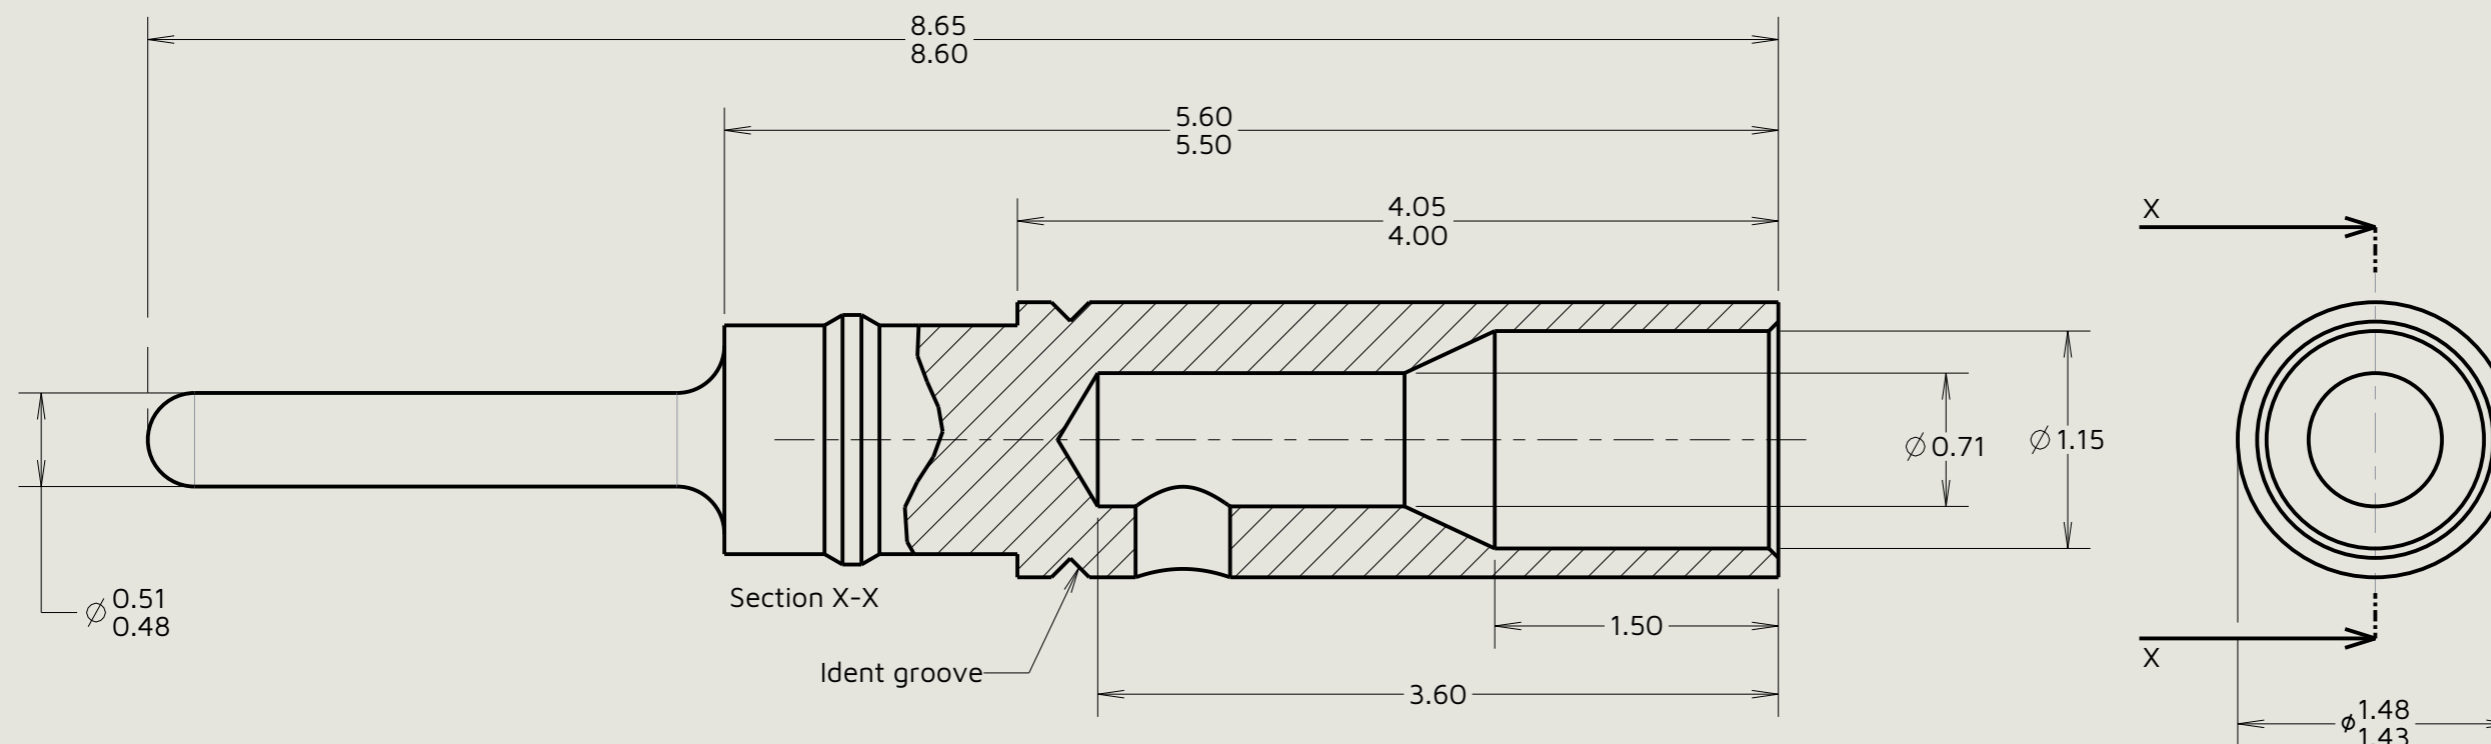

Order Code:
M80-04100XX
 Finish: _____
 05- Gold

AY	18	20.03.26	38257
Initials	Rev.	Date	CO
JMB	10	21.12.06	9627

Notes

- Suitable for wire gauge 24-28 AWG. Maximum insulation diameter Ø1.10mm. BS 3G 210 Type A and wire types listed on Component Specification C049XX (latest issue) are recommended. Strip wire by 2.00mm for crimping.
- Recommended crimp tooling = M22520/2-01 with positioner T5747.
- For crimping method, see Instruction Sheet IS-01.

 www.harwin.com	This drawing and any information or descriptive matter set out hereon are confidential and copyright property of the Harwin group and must not be disclosed, loaned, copied or used for manufacturing, tendering or for any other purpose without their written permission.	TOLERANCES X. = ±0.50mm X.X = ±0.30mm X.XX = ±0.10mm X.XXX = ±0.01mm Angles = ±5° Unless stated	Third angle projection Sheet scale: 25:1 Do not scale Sheet size: A3	MATERIAL: See above FINISH: See above	Title: Datamate L-Tek Male Crimp Plug Contact (24 - 28AWG) Drawing number: M80-04100XX	SHT 2 OF 2