
## **Customer Information Sheet**

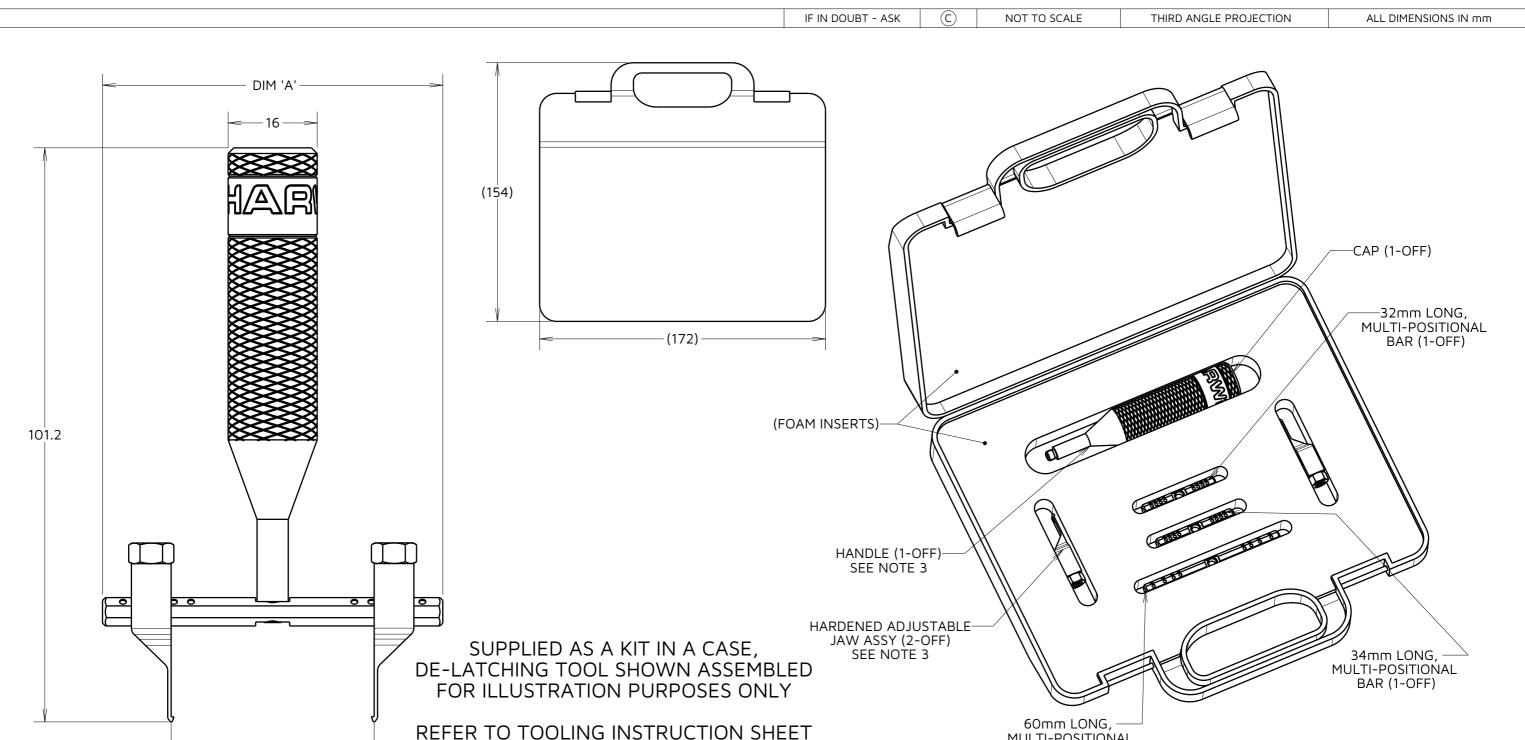

DIM 'A'	DIM 'B'
60.0	21.80, 27.80, 35.80, 45.80
34.0	7.80, 11.80, 15.80, 19.80
32.0	5.80, 9.80, 13.80, 17.80

DIM 'B'

IS-30 PRIOR TO USE.

1. INSTRUCTION SHEETS ARE AVAILABLE FOR THIS TOOL. REFER TO TOOLING INSTRUCTION SHEET IS-30 FOR MORE INFORMATION.

MULTI-POSITIONAL

BAR (1-OFF)

- 2. ANY PARTS REQUIRED TO BE SCREWED TOGETHER, MUST ONLY BE HAND TIGHTENED. 3. HANDLE WITH CARE. WHEN NOT IN USE STORE ADJUSTABLE JAWS IN HANDLE OR CASE.
- 4. FOR REPLACEMENT PARTS REFER TO TOOLING INSTRUCTION SHEET IS-30 FOR

FURTHER DETAILS AND PART NUMBERS.

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATERIAL: **TOLERANCES**  $\begin{array}{c} \text{X.} = \pm 1\text{mm} \\ \text{X.X} = \pm 0.50\text{mm} \\ \text{X.XX} = \pm 0.20\text{mm} \end{array}$ MATTER SET OUT HEREON ARE

PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED LOANED, COPIED OR USED FOR

WRITTEN PERMISSION.

DATAMATE L-TEK **DE-LATCHING TOOL** WITH STORAGE CASE

NAME ISS.

DRAWN:

ASSEMBLY DRG:

APPROVED: F.CHRISPINE

CHECKED: A.BOXALL

DRAWING NUMBER:

Z80-299

8 | 30.04.24 | 34000

S.FLOWER

DATE CN/CO

www.harwin.com

 $X.XXX = \pm 0.01mm$ ANGLES =  $\pm 5^{\circ}$ **UNLESS STATED** 

MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR

CONFIDENTIAL AND COPYRIGHT

SEE ABOVE